




LED paneli

Zamjena za armature s fluorescentnim cijevima

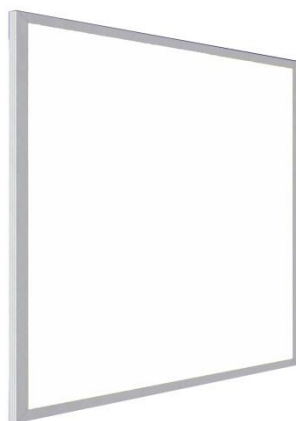

Snaga	10 W	18 W	42 W/45 W	42 W/45 W	75 W
Napon	AC 85 – 265 V	AC 85 – 265 V	AC 85 – 265 V	AC 85 – 265 V	AC 85 – 265 V
Temperatura boje	2700 K – 6500 K	2700 K – 6500 K	2700 K – 6500 K	2700 K – 6500 K	2700 K – 6500 K
Kut svjetla	120°	120°	120°	120°	120°
Svjetlosni tok	480 – 650 lm	1350 – 1530 lm	2800 – 3800 lm	2800 – 3800 lm	5600 – 6300 lm
Uzvrat boje	≥70	≥70	≥70	≥70	≥70
Životni vijek	50000 sati	50000 sati	50000 sati	50000 sati	50000 sati
Dimenzije	300x300 mm	300x300 mm	600x600 mm	300x1200 mm	600x1200 mm
Radna temperatura	-20 – 45 °C	-20 – 45 °C	-20 – 45 °C	-20 – 45 °C	-20 – 45 °C
Materijal	Al+PMMA	Al+PMMA	Al+PMMA	Al+PMMA	Al+PMMA